TECHNICAL SPECIFICATIONS	SFC 709 Ex/38 WB, 4SP CR BS4
POWERTRAIN	
Engine Type	Tata 4SP CR BS4 Turbo Inter-cooled
Displacement/Cubic Capacity	2 956 cc
Max. Power Output	62.5 kW @ 2 800 r/min
Max. Torque	250 Nm @ 1 400 - 2 400 r/min
Bore x Stroke	97 mm x 100 mm
Clutch	Single Plate Dry Friction Type - 280 mm dia
Transmission	GBS27 Synchromesh, 5 Forward + 1 Reverse
FUEL SYSTEM	
Fuel Injection System	Electronic Delphi - Water-cooled Common Rail
Fuel Tank Capacity	120 l
ELECTRICALS	
Battery	12 V, 100 Ah
Alternator	65 A
PERFORMANCE	
Gradeability	27 %
Max. Speed in Top Gear	80 km/h (Restricted by SLD)
STEERING	
Steering System	Integral Hydraulic Assisted Power Steering
FRAME	
Frame	Ladder Type Frame with Riveted/Bolted Cross Members
BRAKES	
Service Brake	Dual Circuit Full Air S-Cam Brakes
Parking Brake	Spring Actuated Parking Brake
SUSPENSION & TYRES	
Front Suspension	Semi-elliptical Leaf Spring and Hydraulic Double Acting Telescopic Type Shock Absorber
Rear Suspension	Semi-elliptical Leaf Spring with Auxiliary Springs and Hydraulic Double Acting Telescopic Type Shock Absorber
No. of Tyres	Front - 2, Rear - 4, Spare - 1
Front	7.50 x 16 - 16 PR Diagonal Ply
Rear	7.50 x 16 - 16 PR Diagonal Ply

	CAB	CLB	HD
WEIGHT			
Front Axle Weight - FAW	2 400 kg	2 400 kg	2 400 kg
Rear Axle Weight - RAW	5 100 kg	5 100 kg	5 100 kg
Rated Payload	4 775 kg	4 275 kg	4 225 kg
Gross Vehicle Weight	7 490 kg	7 490 kg	7 490 kg
OVERALL DIMENSIONS			
Wheelbase	3 800 mm	3 800 mm	3 800 mm
Length	5 975 mm	5 975 mm	5 975 mm
Height	2 290 mm	2 290 mm	2 850 mm
Width	2 051 mm	2 132 mm	2 226 mm
LOAD BODY DIMENSIONS			
Length	NA	3 883 mm	3 844 mm
Width	NA	2 057 mm	2 078 mm
Side Deck Height	NA	603 mm	2 074 mm
Loading Platform Height	NA	1 025 mm	1 025 mm
Min. Turning Dia	13 500 mm	13 500 mm	13 500 mm
Min. Ground Clearance	194 mm	194 mm	194 mm
Warranty	3-year or 3 lakh km (Whichever is earlier)		

Specifications are subject to change without prior notice. These are indicative photos, specifications for reference only.

Ex2 Delighters: Digital Clock, Portable & Clear Lens Lamp, Shirt Hook, Mobile Charger, Rear View Mirror, Utility Box & Reverse Beeper

EX has become synonymous with high performance and superior quality

- ExTRA **REVENUE**
- ExTRA **SAVINGS**
- ExTRA **PROFITS**
- ExTRA **COMFORT**
- ExTRA **SAFETY**

Dealer Stamp

For more information, please visit our website: **www.light-trucks.tatamotors.com**
You can also contact our Sales Office: Tata Motors Limited, 4th Floor, Ahura Centre, 82, Mahakali Caves Road, MIDC, Andheri (East), Mumbai - 400 093 or call toll-free no. **1800 209 7979.**

Terms & Conditions apply as per the policy of ITGI. Insurance available on light, intermediate & heavy commercial vehicles.
CAUTION: Accessories shown in the picture or elsewhere do not constitute standard fitment. The specifications are merely indicative.
Due to continuous product improvements, these specifications are liable to change without notice.

TATA MOTORS
Connecting Aspirations

MAINTAINS HIGH PERFORMANCE WHILE CARRYING HIGH LOADS

SFC 709 Ex

TATA MOTORS ILCV
MILEAGE CHAMPION

DRIVER'S SAFETY | POWERFUL ENGINE | AIR BRAKES | STRONG & RELIABLE AGGREGATES | 3-YEAR/3 LAKH KM WARRANTY

India's Iconic LCVs

The right choice for the Indian market

SFC 709

India's quarry specialist, rightly named as the only light truck with a 62.5 kW & 250 Nm of torque, giving it the ability to mount any gradient and rule any road. The SFC 709 Ex is exceptionally powerful and stable while carrying extreme loads.

SFC: ADVANTAGE

SAFE & COMFORTABLE

We understand that driving commercial vehicles is a serious business. For special applications where often, speed is of the essence, the customer needs to know that he will be safe at all times. The unique 'nose' of the SFC 709 gives confidence, safety and security to the person behind the wheels.

Tata Motors is the only manufacturer in the country actively selling SFC face vehicles in the Light Commercial Vehicle segment. At Tata Motors, we believe that safety is our number one priority.

SALIENT FEATURES

- Battery charge indication lamp
- Reclining and sliding driver seats
- Door handle cum armrest
- Bottle holder
- Seating capacity - Driver + 2
- Seat material - Vinyl fabric
- Moulded roof lining
- Engine compartment light
- Seat belt warning light for driver
- Engine oil low pressure indicator light
- Strongest & reinforced ladder type chassis frame
- Closed pitch load body
- Clear lens head lamp
- Power socket
- Digital clock
- Low loading platform height of 1 025 mm for ease in loading and unloading
- Shortest turning radius of 6 750 mm for easy maneuverability
- High gradeability of 27 %

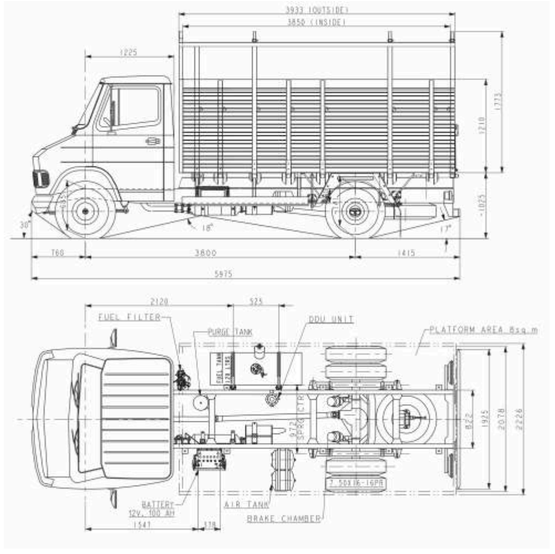

*All dimensions are in mm

MOST FUEL EFFICIENT ENGINE

TATA 4SP CR TURBO INTER-COOLED

- Reliable 4SP CR Engine with 62.5 kW
- Power and 250 Nm Torque Optimised for Best-in-class Power and Mileage
- Largest Clutch Plate (280 mm) in Segment
- BS4 Compliant

TRIED, TESTED & TRUSTED

- Reliable 4SP CR engine
- High horsepower and torque
- Heavy duty aggregates
- Lowest spare parts cost
- Most cost-efficient in its class
- Highest resale value
- Largest customer base

ADDITIONAL AUXILIARY SPRINGS AT REAR

AIR BRAKE FOR MORE EFFECTIVE BRAKING

LARGEST HIGH DESK LOAD BODY IN THE SEGMENT

BIGGER CLUTCH SIZE FOR EASY GEAR SHIFTING

POWER STEERING

INDIA'S QUARRY SPECIALIST

Laterite

Sand

Bricks

Heavy Duty

Steel Coils

Cement